


# F Seal Data Sheet

Acme Reg No: 1809015

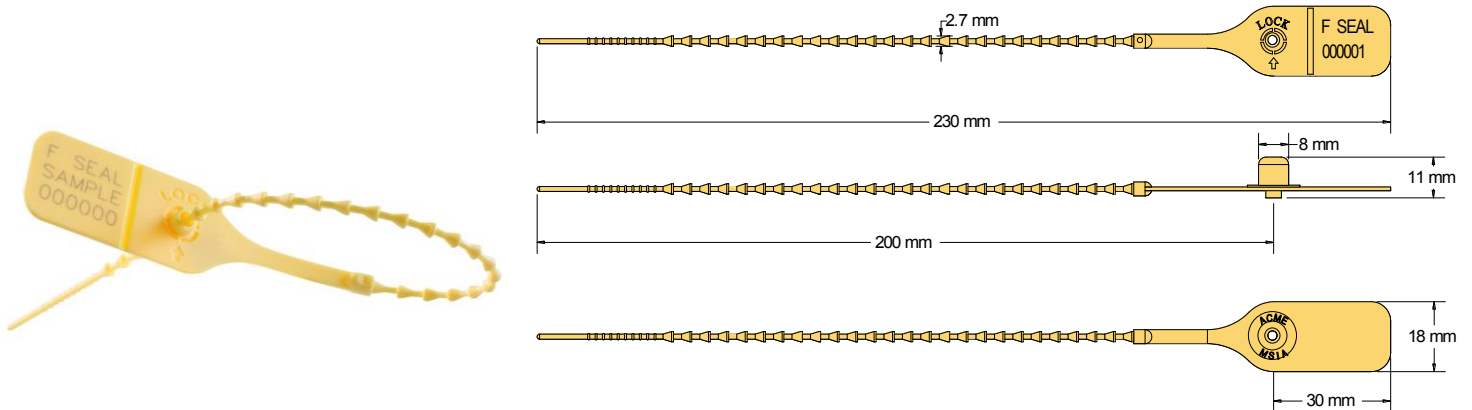

The Acme **F Seal** is a low breaking strength pull-tight seal manufactured from Polypropylene material. The seal can be supplied with a heat rolled over top to prevent tampering by intrusion into the locking head but if tampering is not the main characteristic the seal can be supplied without this added feature. With a 2.7mm diameter ribbon this seal is ideal for applications where there are small sealing apertures.

## Technical Data

### Recommended Applications

Catering Trolleys, Baggage, ATM Dispensers, Gaming Machines, Lockers, Tote Boxes, Fire Extinguishers

### Material

Polypropylene with Biodegradable additives

### Available Operating Lengths

20cm (overall 23cm)

### Ribbon Diameter

2.7mm

### Tag Marking Dimensions

18mm x 30mm

### Average Application Breaking Strength

7kg

### Marking

Laser or Foil marking  
Consecutively numbered as standard  
Optional Customer name/logo  
Optional Laser Barcoding

### Colours

Foil marked: red, blue, green, yellow, black, white.  
Laser or Foil marked: pastel shades of pink, blue, green, yellow, peach, also black and white.  
Other colours may be available on request.

### Packaging

Standard Packaging : 10 per mat and 1,000 seals/carton

Carton Dimensions : 29cm x 20cm x 21cm (L x W x H)

Carton weight : 1.6kg

